NOTES

CAB MAP BOX TO BE SHIPPED LOOSE FOR DEALER INSTALL

TURTLE TILE TO BE INSTALLED PER QW #59-00-0200

DECK GUN PLUMBING TO TERMINATE w/TFT 18" EXTEND-A-GUN AND AKRON APOLLO 3431 MONITOR w/3488 STREAM STR. AND 2499 QUAD TIPS

A 6.25 CUBIC FOOT OIL DRY STORAGE SHALL BE CONSTRUCTED INTERGRAL ABOVE THE WATER TANK BEHIND THE FILL TOWERS A 3" I.D. PIPE SHALL BE PLUMBED FROM THE OIL DRY STORAGE THRU THE WATER TANK WITH 6" EXPOSED FOR HOOK-UP OF COMPT. PIPING AND BALL VALVE

RED HOSE BED COVER w/BUNGEE CORDS TO BE PROVIDED

ALLUM. DA'd 500# ROLL-OUT TRAYS PER QW #59-17-16

ALUM. DA'd 250# ROLL-OUT DROP DOWN TRAY PER QW #59-18-2100

STREAMLIGHT VULCAN HANDLIGHTS TO BE WIRED TO EACH EMS CABINET / HAND LIGHT LOCATION TO BE LOCATED AT FINAL

STREAMLIGHT SURVIVOR HANDLIGHTS TO BE MOUNTED IN A 5-BANK CHARGING UNIT MOUNTED ON BACK OF ENGINE TUNNEL BELOW ENGINE ACCESS DOOR (LIGHTS TO REMOVE UPWARD)

COMPARTMENTS

(A)	TWO	40.50 WIDE	64.50 HIGH	23.75 DEEP
		UPPER	33.38 HIGH	10.75 DEEP
(B)	TWO	47.00 WIDE	64.50 HIGH	23.75 DEEP
		UPPER	33.38 HIGH	10.75 DEEP
(C)	TWO	60.00 WIDE	33.38 HIGH	10.75 DEEP
(D)	ONE	46.00 WIDE	39.00 HIGH	28.00 DEEP
(E)	TWO	22.50 WIDE	30.00 HIGH	18.00 DEEP
		THRU	22.50 HIGH	14.00 DEEP
(F)	FOUR		7-SCBA BOTTLES (TOTAL)	
(H)	TWO	12.00 WIDE	15.00 HIGH	149.50 LONG
(J)	TWO	26.00 WIDE	6.00 HIGH	26.00 DEEP
(K)	TWO	18.00 WIDE	34.75 HIGH	15.00 DEEP
		THRU	19.00 HIGH	18.00 WIDE

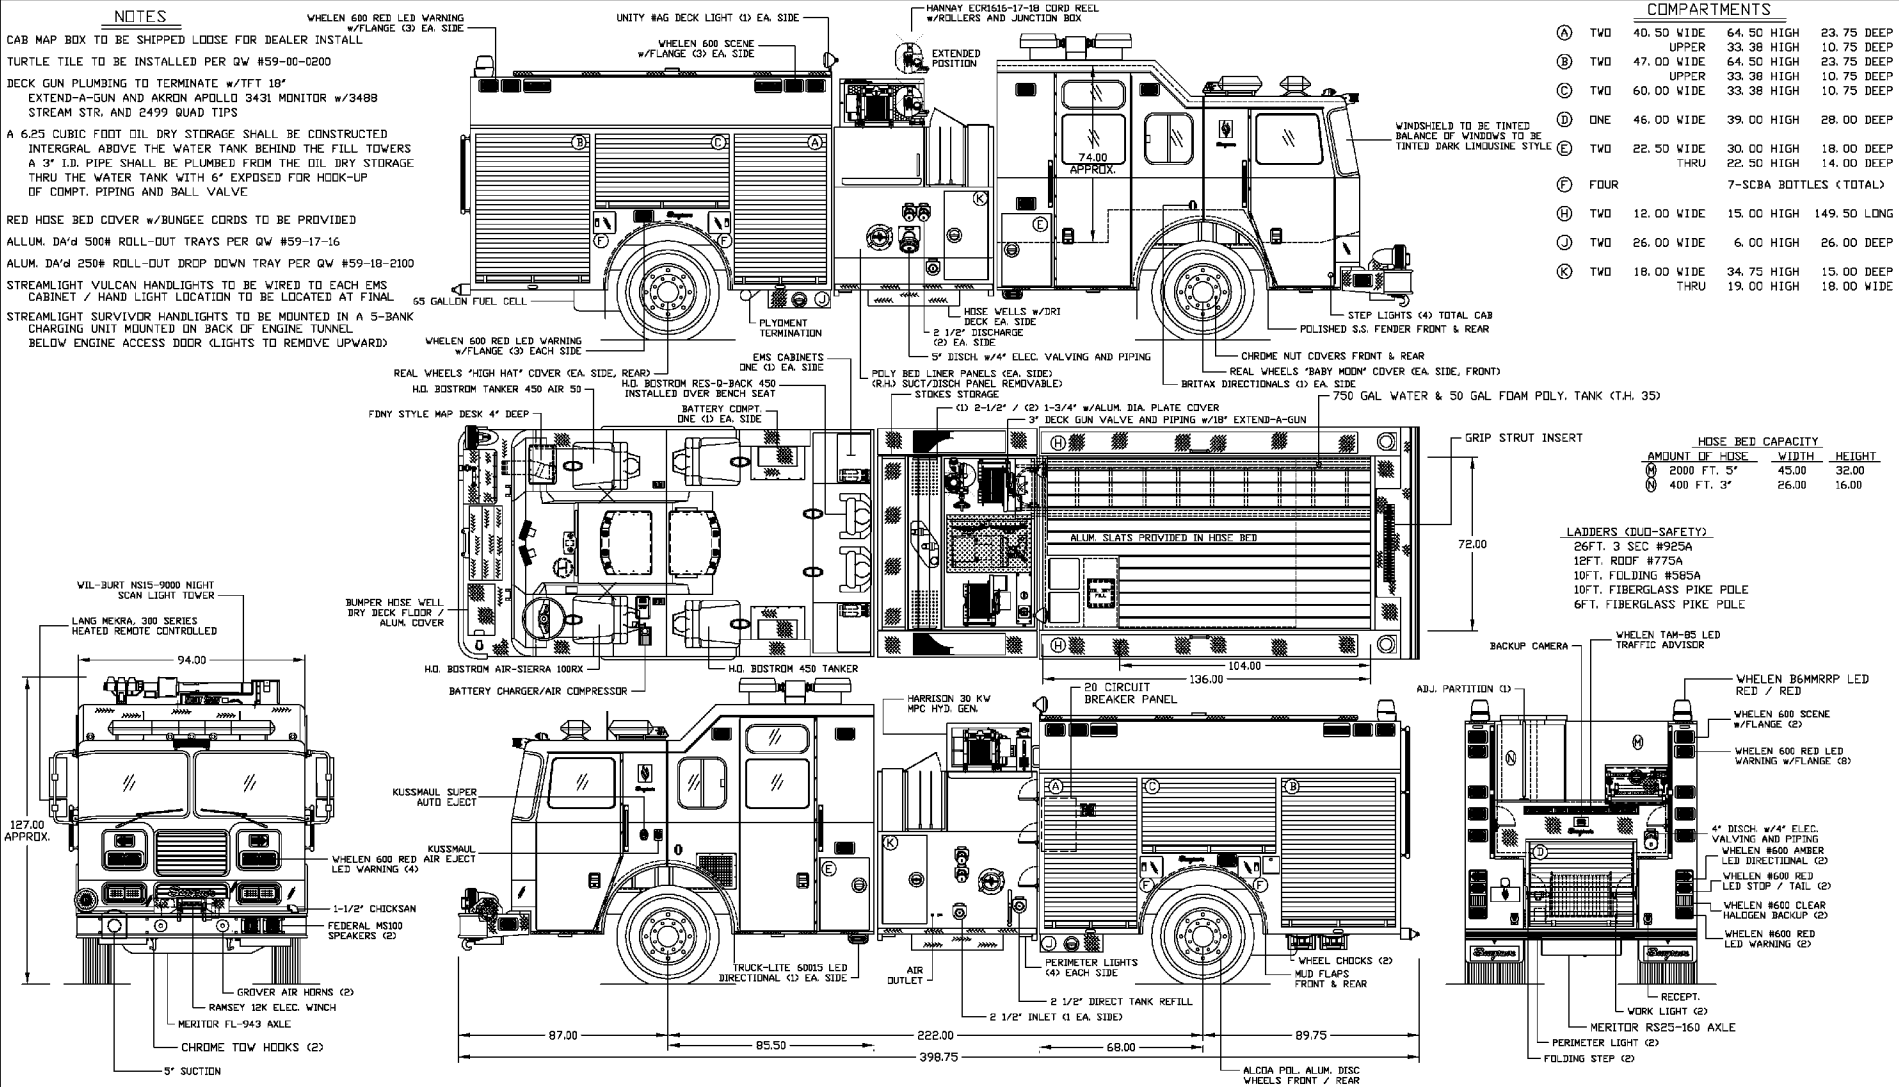

HOSE BED CAPACITY

AMOUNT OF HOSE	WIDTH	HEIGHT
(M) 2000 FT. 5"	45.00	32.00
(N) 400 FT. 3"	26.00	16.00

LADDERS (DUO-SAFETY)

26FT. 3 SEC #925A
12FT. ROOF #775A
10FT. FOLDING #585A
10FT. FIBERGLASS PIKE POLE
6FT. FIBERGLASS PIKE POLE

REVISED: 07/03/2007 S.C. 78	PJW	REVISED: 12/21/2006	PJW	REVISED: 12/07/2006 UPDATE #1	RJL	REVISED: 12/07/2006 UPDATE #2	RJL

NOTE:DIMENSIONS SHOWN ARE APPROX. & SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION. THE INDICATED VEHICLE HEIGHT REPRESENTS A CALCULATED DIMENSION. THE ACTUAL HEIGHT OF THE UNIT AS SHIPPED FROM THE FACTORY MAY VARY. THE HOSE CAPACITY IS A CALCULATED AMOUNT. THE ACTUAL CAPACITY MAY VARY DEPENDENT UPON THE STYLE AND VENDOR OF THE HOSE. MINOR DETAILS NOT SHOWN. WHERE THERE MAY BE NONCONFORMITY BETWEEN THE ILLUSTRATION AND THE SALES ORDER THE ORIGINAL SALES ORDER & ALL APPROVED SALES CHANGES WILL PREVAIL.

MODEL TB 70 DA PROPOSED FOR SALES ORDER 78E19

FIRE DISTRICT NO. 1 / TOWNSHIP OF BERLIN

WEST BERLIN , NEW JERSEY

CAB	TID RR15	FRT. AXLE	#FL-943
ENGINE	SERIES 60 500HP	REAR AXLE	#RS25-160
PUMP	WATEROUS 2000	FUEL	65 GAL.
BODY MATL	LONG	WATER	750 GAL
AERIAL	N/A	FOAM	50 GAL

Seagrave Fire Apparatus, LLC
105 S 12th St
Clintonville, WI 54929
125th Anniversary Since 1881

CUSTOMER APPROVED: 12-21-2006

DRAWN BY: RJL

DATE: 11/03/06

SCALE 1/2"=1FT

NO. 13834